

SINAMICS G120D

distributed inverters

0.75 kW to 7.5 kW (1.0 hp to 10 hp)

8







8/2	Introduction
8/2	Application
8/2	More information
8/3	SINAMICS G120D distributed inverters
8/3	Overview
8/4	Benefits
8/5	Design
8/6	Configuration
8/7	Technical specifications
8/8	CU240D Control Units
8/8	Overview
8/9	Selection and ordering data
8/9	Design
8/11	Integration
8/14	Technical specifications
8/16	PM250D Power Modules
8/16	Overview
8/16	Selection and ordering data
8/17	Integration
8/18	Technical specifications
8/21	Characteristic curves
8/22	Dimensional drawings
8/23	Recommended line-side power components
8/24	Supplementary system components
8/24	Intelligent Operator Panel IOP Handheld
8/25	SINAMICS micro memory card (MMC)
8/25	RS232 interface cable for communication with a PC
8/25	USB interface cable for communication with a PC
8/25	STARTER commissioning tool
8/26	PROFINET connecting cables
8/26	PROFIBUS connecting cables
8/26	Connecting cables/connectors for supplying the Control Unit with power
8/26	Connecting cables and connectors for digital inputs
8/27	Connecting cables pre-assembled at one end and connector sets to connect to the line supply
8/27	Motor cables pre-assembled at one end and connector sets to connect the Power Module to the motor
8/28	Power bus distribution 400 V in IP65 degree of protection
8/28	Additional information
8/29	Spare parts
8/29	Spare Parts Kit
8/29	Replacement fans

SINAMICS G120D distributed inverters

0.75 kW to 7.5 kW (1.0 hp to 10 hp)

Introduction

Application

Application	Continuous motion			Non-continuous motion			
	Requirements for torque accuracy / speed accuracy / position accuracy / coordination of axes / functionality	Basic	Medium	High	Basic	Medium	High
Pumping, ventilating, compressing 	Centrifugal pumps Radial / axial fans Compressors	Centrifugal pumps Radial / axial fans Compressors	Eccentric screw pumps	Hydraulic pumps Metering pumps	Hydraulic pumps Metering pumps	Descaling pumps Hydraulic pumps	
	G110, G120C (G130, G150, GM150, GL150)	G120P, G120C, G120 (G130, G150, GM150, GL150)	S120	S110	S110, S120	S120 (GM150)	
Moving 	Conveyor belts Roller conveyors Chain conveyors	Conveyor belts Roller conveyors Chain conveyors Lifting/lowering devices Elevators Escalators/moving walkways Indoor cranes Marine drives Cable railways	Elevators Container cranes Mining hoists Excavators for open-cast mining Test bays	Acceleration conveyors Storage and retrieval machines	Acceleration conveyors Storage and retrieval machines Cross cutters Reel changers	Storage and retrieval machines Robotics Pick & place Rotary indexing tables Cross cutters Roll feeds Engagers/disengagers	
	G110, G110D, G120C (G130, G150, GM150)	G120D, G120C, G120, S120 (G130, G150, S150, GM150, GL150, SM150, DCM, SIMATIC ET200S, SIMATIC ET200pro)	S120 (S150, SM150, SL150, GM150, DCM)	S110	S110, S120 (DCM)	S120 (DCM)	
Processing 	Mills Mixers Kneaders Crushers Agitators Centrifuges	Mills Mixers Kneaders Crushers Agitators Centrifuges Extruders Rotary furnaces	Extruders Winders and unwinders Lead/follower drives Calenders Main press drives Printing machines	Tubular bagging machines Single-axis motion control such as • Position profile • Path profile	Tubular bagging machines Single-axis motion control such as • Position profile • Path profile	Servo presses Rolling mill drives Multi-axis motion control such as • Multi-axis positioning • Cams • Interpolations	
	G120C (G130, G150, GM150)	G120C, G120 (G130, G150, S150, GM150, GL150, DCM)	S120 (S150, DCM)	S110	S110, S120	S120 (SM150, SL150, DCM)	
Machining 	Main drives for • Turning • Drilling • Milling	Main drives for • Drilling • Sawing	Main drives for • Turning • Drilling • Milling • Gear cutting • Grinding	Axle drives for • Turning • Drilling • Milling	Axle drives for • Drilling • Sawing	Axle drives for • Turning • Drilling • Milling • Lasering • Gear cutting • Grinding • Nibbling and punching	
	S110	S110, S120	S120	S110	S110, S120	S120	

(Devices in brackets are not included in Catalog D 31)

SINAMICS G120D is ideally suited for demanding conveyor system applications in the industrial environment for which a distributed drive with communications capability is required. This applies in particular to the automotive sector, e.g. for assembly lines.

SINAMICS G120D is also suitable for many additional high-performance applications, e.g. in the airport sector, the food and beverage industry (without surfactants) and in distribution logistics (e.g. electric monorail systems).

More information

You may also be interested in these inverters/converters:

- Reduced functional scope ⇒ SINAMICS G110D ([chapter 7](#))
- More performance for the control cabinet in IP20 degree of protection ⇒ SINAMICS G120 ([chapter 6](#))
SINAMICS G120C ([chapter 4](#))
- With positioning function in the control cabinet in IP20 degree of protection ⇒ SINAMICS S110 ([chapter 9](#))
- For more axes in a small space ⇒ SIMATIC ET200S FC, SIMATIC ET200pro FC ([Catalog ST 70](#))

SINAMICS G120D distributed inverters

0.75 kW to 7.5 kW (1.0 hp to 10 hp)

SINAMICS G120D distributed inverters

Overview

The SINAMICS G120D distributed inverter series is the solution for demanding drive tasks especially in the field of conveyor systems. SINAMICS G120D inverters continuously control the speed of three-phase asynchronous (induction) motors and fulfill all the requirements of conveyor system applications from simple frequency control through to demanding vector control. With its intelligent modular design with IP65 degree of protection, it can be seamlessly integrated into the plant or system and supports a high plant availability and low stocks of spare parts. The innovative power unit concept capable of energy recovery helps to save energy. The patented implementation concept of integrated Safety functions is unique worldwide, permitting improved plant and system designs with a higher productivity. This drive can be optimally integrated into the Siemens TIA world of automation via PROFIBUS or PROFINET.

With different device versions (frame sizes FSA to FSC) in a power range from 0.75 kW to 7.5 kW (1.0 hp to 10 hp), it is suitable for a wide variety of drive solutions.



Example: SINAMICS G120D, frame size FSA, comprising PM250D Power Module and fail-safe CU240D DP-F Control Unit

Reasons for using distributed drive systems

- Modular drive solutions – therefore standardized mechatronic elements that can be individually tested
- A control cabinet is not required, resulting in a smaller space requirement and lower cooling requirements
- Long cables between the inverter and motor can be avoided (which means lower power losses, reduced noise emission and lower costs for shielded cables and additional filters)
- Distributed configurations offer considerable benefits for conveyor systems with their extensive coverage (e.g. in the automotive and logistics sectors)

Siemens family of distributed drives

Siemens offers an innovative portfolio of frequency inverters to optimally implement distributed drive solutions. The strengths of the individual members of the drive family permit simple adaptation to the widest range of application demands:

- Identical connection systems
- Identical mounting dimensions for SINAMICS G110D and SINAMICS G120D
- Standard commissioning and configuration tool

Products from the family of distributed drives:

- SINAMICS G110D inverters
- SINAMICS G120D inverters
- SIMATIC ET 200S FC drive converters
- SIMATIC ET 200pro FC drive converters
- SIRIUS M200D motor starters

Modularity

SINAMICS G120D is a modular inverter system with IP65 degree of protection comprising various function units. The main units are

- Control Unit (CU)
- Power Module (PM)

The Control Unit controls and monitors the Power Module and the connected motor using several different closed-loop control types that can be selected. The digital inputs and digital outputs on the device support the simple wiring of sensors and actuators directly at the drive. The input signals can either be directly linked within the Control Unit and initiate local responses independently or they can be transferred to the central control via PROFIBUS or PROFINET for further processing within the context of the overall plant.

The Power Module supplies the motor in a power range from 0.75 kW to 7.5 kW (1.0 hp to 10 hp). The Power Module is controlled by a microprocessor in the Control Unit. State-of-the-art IGBT technology with pulse-width-modulation is used for highly reliable and flexible motor operation. Comprehensive protection functions provide a high degree of protection for the Power Module and the motor. The unusually low profile mechanical design is optimized so that the device can be directly used in the plant or system. The Power Module also has the same drilling dimensions for all power ratings (standard footprint). Further, the dimensions are identical to those of SINAMICS G110D. This significantly simplifies the mechanical design, installation and retrofit of a system.

The latest technical documentation (catalogs, dimension drawings, certificates, manuals and operating instructions), are available in the Internet at the following address:

www.siemens.com/sinamics-g120d/documentation

and offline on the DVD-ROM CA 01 in the DT Configurator. In addition, the DT Configurator can be used on the Internet without requiring any installation. The DT Configurator can be found in the Siemens Industry Mall at the following address:

www.siemens.com/dt-configurator

SINAMICS G120D distributed inverters

0.75 kW to 7.5 kW (1.0 hp to 10 hp)

SINAMICS G120D distributed inverters

Overview

Safety Integrated

The SINAMICS G120D distributed inverters include versions for safety-oriented applications. All Power Modules are already designed for Safety Integrated. A Safety Integrated Drive can be created by combining a Power Module with the relevant fail-safe Control Unit.

The SINAMICS G120D fail-safe inverter provides three safety functions, certified in accordance with EN 954-1, Category 3 and IEC 61508 SIL 2:

- Safe Torque Off (STO)
to protect against active movement of the drive
- Safe Stop 1 (SS1)
for continuous monitoring of a safe braking ramp
- Safely Limited Speed (SLS)
for protection against dangerous movements when a speed limit is exceeded

The functions "Safe Stop 1" and "Safely Limited Speed" can both be implemented without having to use a motor encoder or encoder; the implementation costs are minimal. Existing systems in particular can be simply updated with safety technology without the need to change the motor or mechanical system.

The safety functions "Safely Limited Speed" and "Safe Stop 1" are certified for asynchronous (induction) motors without encoders – these safety functions are not permitted for applications involving pull-through loads such as hoisting gear and unwinders.

Additional information is provided in chapter Highlights, section Safety Integrated.

Efficient Infeed Technology

The innovative Efficient Infeed Technology is employed in PM250D Power Modules. This technology allows the energy produced by motors operating in generator mode connected to standard inverters to be fed back into the supply system. At the same time, considerable savings can be achieved in terms of energy consumption and operating costs.

Additional information is included in chapter Highlights, section Efficient Infeed Technology.

STARTER commissioning tool

The STARTER commissioning tool (V4.1, SP1 and higher) allows menu-prompted commissioning and maintenance of SINAMICS G120D inverters. The operator guidance combined with comprehensive, user-friendly functions for the relevant drive solution allow you to commission the device quickly and easily.

Benefits

- Mechanical design, installation and retrofit of systems are significantly simplified as a result of the compact and space-saving design with an extremely low profile and with the same drilling dimensions for all power ratings; further, the dimensions are identical to those of the SINAMICS G110D distributed inverter
- Wide power range from 0.75 kW to 7.5 kW (1.0 hp to 10 hp)
- The safety functions make it easier to integrate drives into safety-oriented machines or plants
- The innovative circuit design (bidirectional input rectifier with "pared-down" DC link) allows the kinetic energy of a load to be fed back into the line supply system. This feedback capability provides enormous potential for energy saving because generated energy no longer has to be converted into heat in a braking resistor. Braking resistors and reactors are not necessary – this is a particular advantage in terms of the space requirement and installation costs for the high IP65 degree of protection.

- Easy commissioning and maintenance as a result of the same, standardized connectors for the bus, power and I/O connections (ISO 23570) for the complete range of power ratings of SINAMICS G110D and SINAMICS G120D
- Increased degree of ruggedness and longer service life as the electronic modules are coated
- Flexibility due to modularity for a future-oriented distributed drive concept with a high IP65 degree of protection
 - Module replacement under voltage (hot swapping)
 - The modules can be easily replaced, which makes the system extremely service friendly.
- Simple, standard implementation of completely distributed plant and system concepts by using products in a scalable fashion:
 - SIRIUS M200D (motor starter)
 - SINAMICS G110D (inverter for basic conveyor-related applications)
 - SINAMICS G120D (inverter for demanding conveyor-related applications)
- The same connectors are used as for the SIRIUS M200D motor starter
- Communications-capable via PROFINET or PROFIBUS with PROFIdrive profile 4.0:
 - Reduced number of interfaces
 - Plant-wide engineering
 - Easy to handle
- Simple connection, engineering, data management as well as control of the inverter in sophisticated plants and systems as a result of the consequential integration in TIA (Totally Integrated Automation)
- High degree of operator friendliness by using the Intelligent Operator Panel (IOP) to parameterize, diagnose, control (open-loop) and copy drive parameters in the BOP
- The ability to connect up to 6 sensors and 2 actuators directly to the Control Unit means that almost all of the drive information can be managed directly; local preprocessing of the signals takes the load off the fieldbus and ensures a fast and reproducible response time.
- Integrated EMC filter class A (acc. to EN 55011)
- Integrated brake control, brake voltages that are supported 400 V AC/180 V DC
- Integrated motor protection using a thermal motor model and evaluation of PTC, Thermo-Click or KTY 84 temperature sensors
- Software parameters for simple adaptation to 50 Hz or 60 Hz motors (IEC or NEMA motors)
- Easy replacement of devices and fast copying of parameters to the optional SINAMICS micro memory card (MMC)
- Engineering and commissioning with standard engineering tools such as SIZER for Siemens Drives (V2.9 and higher), STARTER (V4.1, SP1 and higher) and Drive ES ensure fast engineering and easy commissioning – STARTER is integrated into STEP 7 with Drive ES Basic, with all the advantages of central data storage and totally integrated communication
- Certified worldwide for compliance with CE, UL, cUL, C-tick and Safety Integrated according to EN 954-1, Category 3 and IEC 61508 SIL 2


SINAMICS G120D distributed inverters

0.75 kW to 7.5 kW (1.0 hp to 10 hp)

SINAMICS G120D distributed inverters

Design

The SINAMICS G120D distributed inverters are modular inverters for standard drives. Each SINAMICS G120D comprises two operative units – a Power Module and a Control Unit.

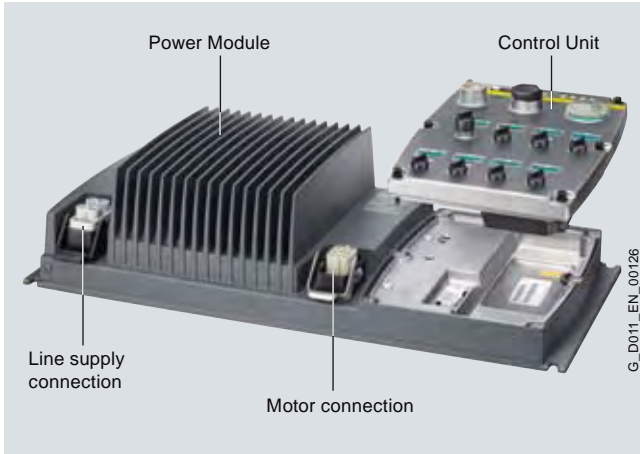

PM250D Power Module with line supply and motor connections and CU240D Control Unit

Power Modules

The following Power Modules are available for the SINAMICS G120D distributed inverters:

PM250D Power Modules

PM250D Power Modules (0.75 kW to 7.5 kW/1.0 hp to 10 hp) have an innovative circuit design which allows line-commutated energy recovery back into the line supply. This innovative circuit permits generated energy to be fed back into the supply system and therefore saves energy.

Control Units

The following Control Units are available for SINAMICS G120D distributed inverters:

CU240D Control Units

The Control Unit performs closed-loop control functions for the inverter. In addition to the closed-loop control, it has additional functions that can be adapted to the particular application through parameterization. Several Control Units are available in different versions:

- CU240D DP
- CU240D DP-F
- CU240D PN
- CU240D PN-F
- CU240D PN-F PP

Supplementary system components

Intelligent Operator Panel IOP Handheld

The IOP supports both entry-level personnel and drive experts. Thanks to the large plain text display, the menu-based operation and the application wizards, it is easy to commission, diagnose and locally control standard drives.

SINAMICS micro memory card (MMC)

The parameter settings for an inverter can be stored on the SINAMICS micro memory card (MMC). When service is required, e.g. after the inverter has been replaced and the data have been downloaded from the memory card the drive system is immediately ready for use again. The associated slot is located on the rear of the Control Unit.

RS232 interface cable for communication with a PC

For controlling and commissioning an inverter directly from a PC if the appropriate software (STARTER commissioning tool V4.1, SP1 and higher) has been installed.

USB interface cable for communication with a PC

For controlling and commissioning an inverter directly from a PC if the appropriate software (STARTER commissioning tool V4.1.3 and higher) has been installed.

Connecting cable for the Control Units

Flexible plug-in cables to transfer data between the industrial Ethernet stations or PROFIBUS stations, as well as to supply power to the Control Unit.

Connecting cable for the Power Modules

Connector sets to connect to the line supply and the outgoing motor feeder are available as accessories as well as pre-assembled motor cables for connection to the motor.

Spare Parts Kit

A Spare Parts Kit is available which comprises small parts such as seals, caps, PROFIBUS address windows and screws.

Replacement fan

A replacement fan is available, which comprises a pre-mounted unit with cover, fan and screws.

SINAMICS G120D distributed inverters

0.75 kW to 7.5 kW (1.0 hp to 10 hp)

SINAMICS G120D distributed inverters

Configuration

The following electronic configuring aids and engineering tools are available for the SINAMICS G120D distributed inverters:

Selection guide DT Configurator within the CA 01

The interactive catalog CA 01 – the offline mall of Siemens Industry Automation & Drive Technologies – contains over 100000 products with approximately 5 million possible drive system product variants. The DT Configurator has been developed to facilitate selection of the optimum motor and/or inverter from the wide spectrum of drives. The configurator is integrated as a "selection guide" in this catalog on the DVD-ROM with the selection and configuration tools.

Online DT Configurator

In addition, the DT Configurator can be used in the Internet without requiring any installation. The DT Configurator can be found in the Siemens Industry Mall at the following address:

www.siemens.com/dt-configurator

SIZER for Siemens Drives engineering tool

The SIZER for Siemens Drives engineering tool makes it easy to engineer the SINAMICS and MICROMASTER 4 drive families. It provides support when selecting the hardware and firmware components necessary to implement a drive task. SIZER for Siemens Drives covers the full range of operations required to configure a complete drive system, from basic single drives to demanding multi-axis applications, for SINAMICS G120D from SIZER for Siemens Drives V2.9 and higher.

STARTER commissioning tool

The STARTER commissioning tool allows menu-prompted commissioning, optimization and diagnostics. In addition to SINAMICS drives, STARTER is also suitable for MICROMASTER 4 units and the frequency converters for the distributed I/O SIMATIC ET 200S FC and SIMATIC ET 200pro FC. For SINAMICS G120D from STARTER V4.1, SP1 and higher.

Drive ES engineering system

Drive ES is the engineering system that can be used to integrate the communication, configuration and data management functions of Siemens drive technology into the SIMATIC automation world easily, efficiently and cost-effectively. The STEP 7 Manager user interface provides the ideal basis for this. A variety of software packages are available for SINAMICS – Drive ES Basic, Drive ES SIMATIC and Drive ES PCS 7.1.

SINAMICS G120D distributed inverters

0.75 kW to 7.5 kW (1.0 hp to 10 hp)

SINAMICS G120D distributed inverters

Technical specifications

Unless explicitly specified otherwise, the following technical specifications are valid for all the following SINAMICS G120D distributed inverter components listed here.

SINAMICS G120D	
Mechanical specifications	
Vibratory load according to EN 60068-2-6	
• Transport ¹⁾	5 ... 9 Hz: Constant deflection 3.1 mm 9 ... 200 Hz: Constant acceleration = 9.81 m/s ² (1 × g)
• Operation	10 ... 58 Hz: Constant deflection 0.15 mm 58 ... 200 Hz: Constant acceleration = 19.62 m/s ² (2 × g)
Shock load according to EN 60068-2-27	
• Transport ¹⁾	147.15 m/s ² (15 × g)/11 ms 3 shocks in each axis and direction
• Operation	147.15 m/s ² (15 × g)/11 ms 3 shocks in each axis and direction
Ambient conditions	
Protection class according to EN 61800-5-1	Class III (PELV)
Touch protection according to EN 61800-5-1	Class I (with protective conductor system)
Permissible ambient and coolant temperature (air) during operation for Power Modules	-10 ... +40 °C (14 ... 104 °F) without derating >40 ... 55 °C (104 ... 131 °F) see derating characteristics
Permissible ambient and coolant temperature (air) during operation for Control Units	CU240D DP: -10 ... +55 °C (14 ... 131 °F) CU240D PN: -10 ... +50 °C (14 ... 122 °F) CU240D DP-F: 0 ... 55 °C (32 ... 131 °F) CU240D PN-F: 0 ... 50 °C (32 ... 122 °F) CU240D PN-F PP: 0 ... 50 °C (32 ... 122 °F) (>40 ... 55 °C (104 ... 131 °F) see derating characteristics) up to 2000 m (6562 ft) above sea level
Humidity, max.	95 % at 40 °C (104 °F)
Ambient temperature	
• Storage ¹⁾ acc. to EN 60068-2-1	-40 ... +70 °C (-40 ... +158 °F)
• Transport ¹⁾ acc. to EN 60068-2-1	-40 ... +70 °C (-40 ... +158 °F)
• Operation acc. to EN 60068-2-2	-10 ... +40 °C (14 ... 104 °F) without derating
Environmental class/harmful chemical substances	
• Operation acc. to EN 60721-3-3	Class 3C2
Degree of pollution acc. to EN 61800-5-1	2
Certification for fail-safe versions	
• Category acc. to EN 954-1	3
• SIL Cl acc. to IEC 61508	2
• PL acc. to ISO 13849	Available soon
• PFH _D	5 × 10 ⁻⁸
• T1	20 years
Standards	
Compliance with standards	UL 508C (UL list number E121068), CE, c-tick ²⁾
CE marking, according to	Low-Voltage Directive 2006/95/EC
EMC Directive ³⁾	
• Frame sizes FSA to FSC with integrated line filter class A	Category C2 ⁴⁾ according to EN 61800-3 (corresponds to class A according to EN 55011)
	Note: The EMC product standard EN 61800-3 does not apply directly to a frequency inverter but to a PDS (Power Drive System), which comprises the complete circuitry, motor and cables in addition to the inverter. The frequency inverters on their own do not generally require identification according to the EMC Directive.

¹⁾ In transport packaging.

²⁾ UL/c-tick certification for the CU240D PN-F PP Control Unit will be available soon.

³⁾ For further general information, [see also chapter SINAMICS G110, section Technical specifications, Compliance with standards.](#)

⁴⁾ With shielded motor cable up to 15 m (49 ft).

SINAMICS G120D distributed inverters

0.75 kW to 7.5 kW (1.0 hp to 10 hp)

CU240D Control Units

Overview



Example of CU240D DP-F Control Unit



Example of CU240D PN-F PP Control Unit



Example of CU240D PN-F Control Unit

The Control Unit performs closed-loop control functions for the inverter. In addition to the closed-loop control, it has additional functions that can be adapted to the particular application through parameterization. Control Units are available in different versions:

- CU240D DP
- CU240D DP-F
- CU240D PN
- CU240D PN-F
- CU240D PN-F PP (Push Pull)

The Push Pull version comprises an alternative connection method for the 24 V supply voltage and the PN communication.

Safety Integrated functions

The SINAMICS G120D fail-safe inverter provides three safety functions, certified in accordance with EN 954-1, Category 3 and IEC 61508 SIL 2:

- Safe Torque Off (STO) to protect against active movement of the drive
- Safe Stop 1 (SS1) for continuous monitoring of a safe braking ramp
- Safely Limited Speed (SLS) for protection against dangerous movements on exceeding a speed limit

The functions "Safe Stop 1" and "Safely Limited Speed" can both be implemented without having to use a motor encoder or encoder; the implementation costs are minimal. Existing systems in particular can be simply updated with safety technology without the need to change the motor or mechanical system.

The safety functions "Safely Limited Speed" and "Safe Stop 1" are not certified for pull-through loads such as hoisting gear and unwinders.

Safety functions have been extended with firmware V3.2.

[Additional information is provided in chapter Highlights, section Safety Integrated.](#)

SINAMICS G120D distributed inverters


0.75 kW to 7.5 kW (1.0 hp to 10 hp)

CU240D Control Units


Selection and ordering data

Communication	Digital inputs	Digital outputs	Encoder interfaces	Designation	CU240D Control Unit Order No.
Standard					
PROFIBUS DP	6	2	1	CU240D DP	6SL3544-0FA20-1PA0
PROFINET	6	2	1	CU240D PN	6SL3544-0FA20-1FA0
Fail-safe for Safety Integrated					
PROFIBUS DP	6	2	1	CU240D DP-F	6SL3544-0FA21-1PA0
PROFINET	6	2	1	CU240D PN-F	6SL3544-0FA21-1FA0
PROFINET	6	2	1	CU240D PN-F PP	6SL3544-0FA21-1FB0


Design

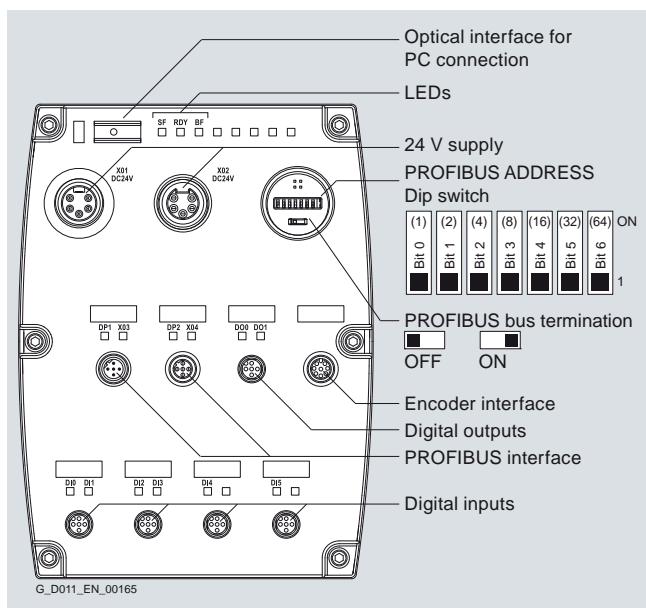


CU240D DP Control Unit

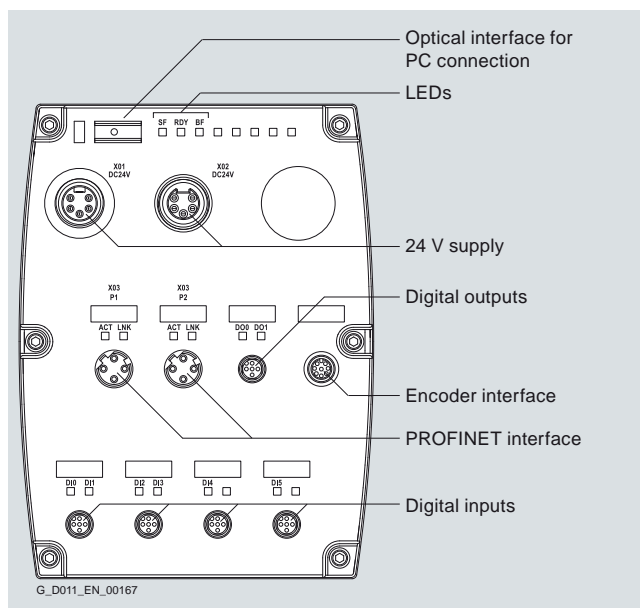

CU240D PN Control Unit

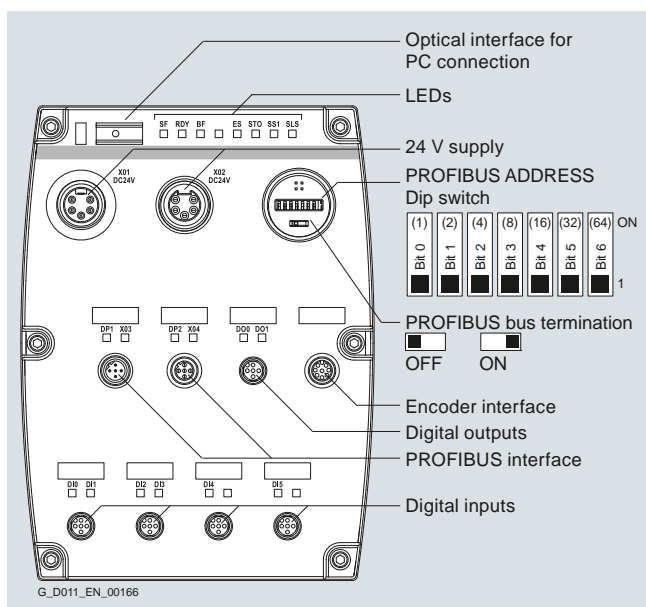

CU240D DP-F Control Unit

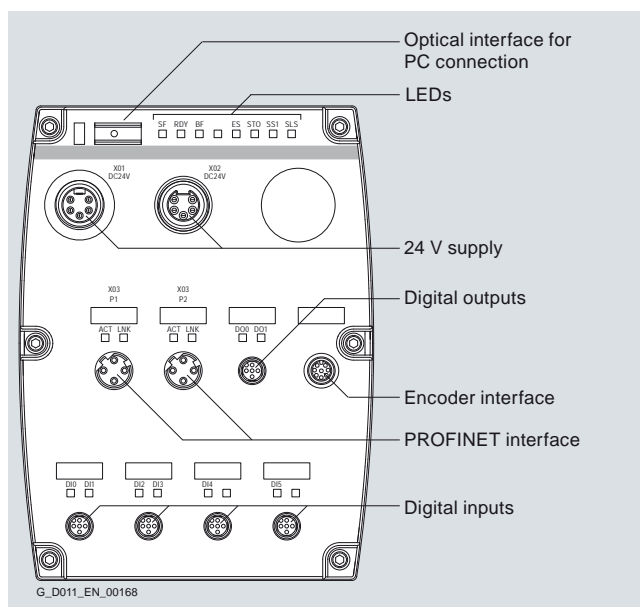


CU240D PN-F Control Unit

SINAMICS G120D distributed inverters

0.75 kW to 7.5 kW (1.0 hp to 10 hp)

CU240D Control Units


Design

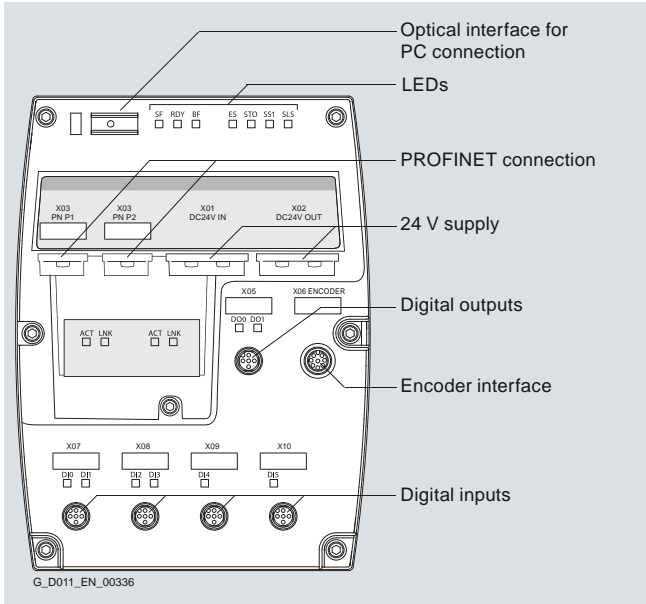

Control Unit, view from the rear, MMC card slot at the top and PM-IF interface at bottom center

CU240D PN-F PP Control Unit

Integration

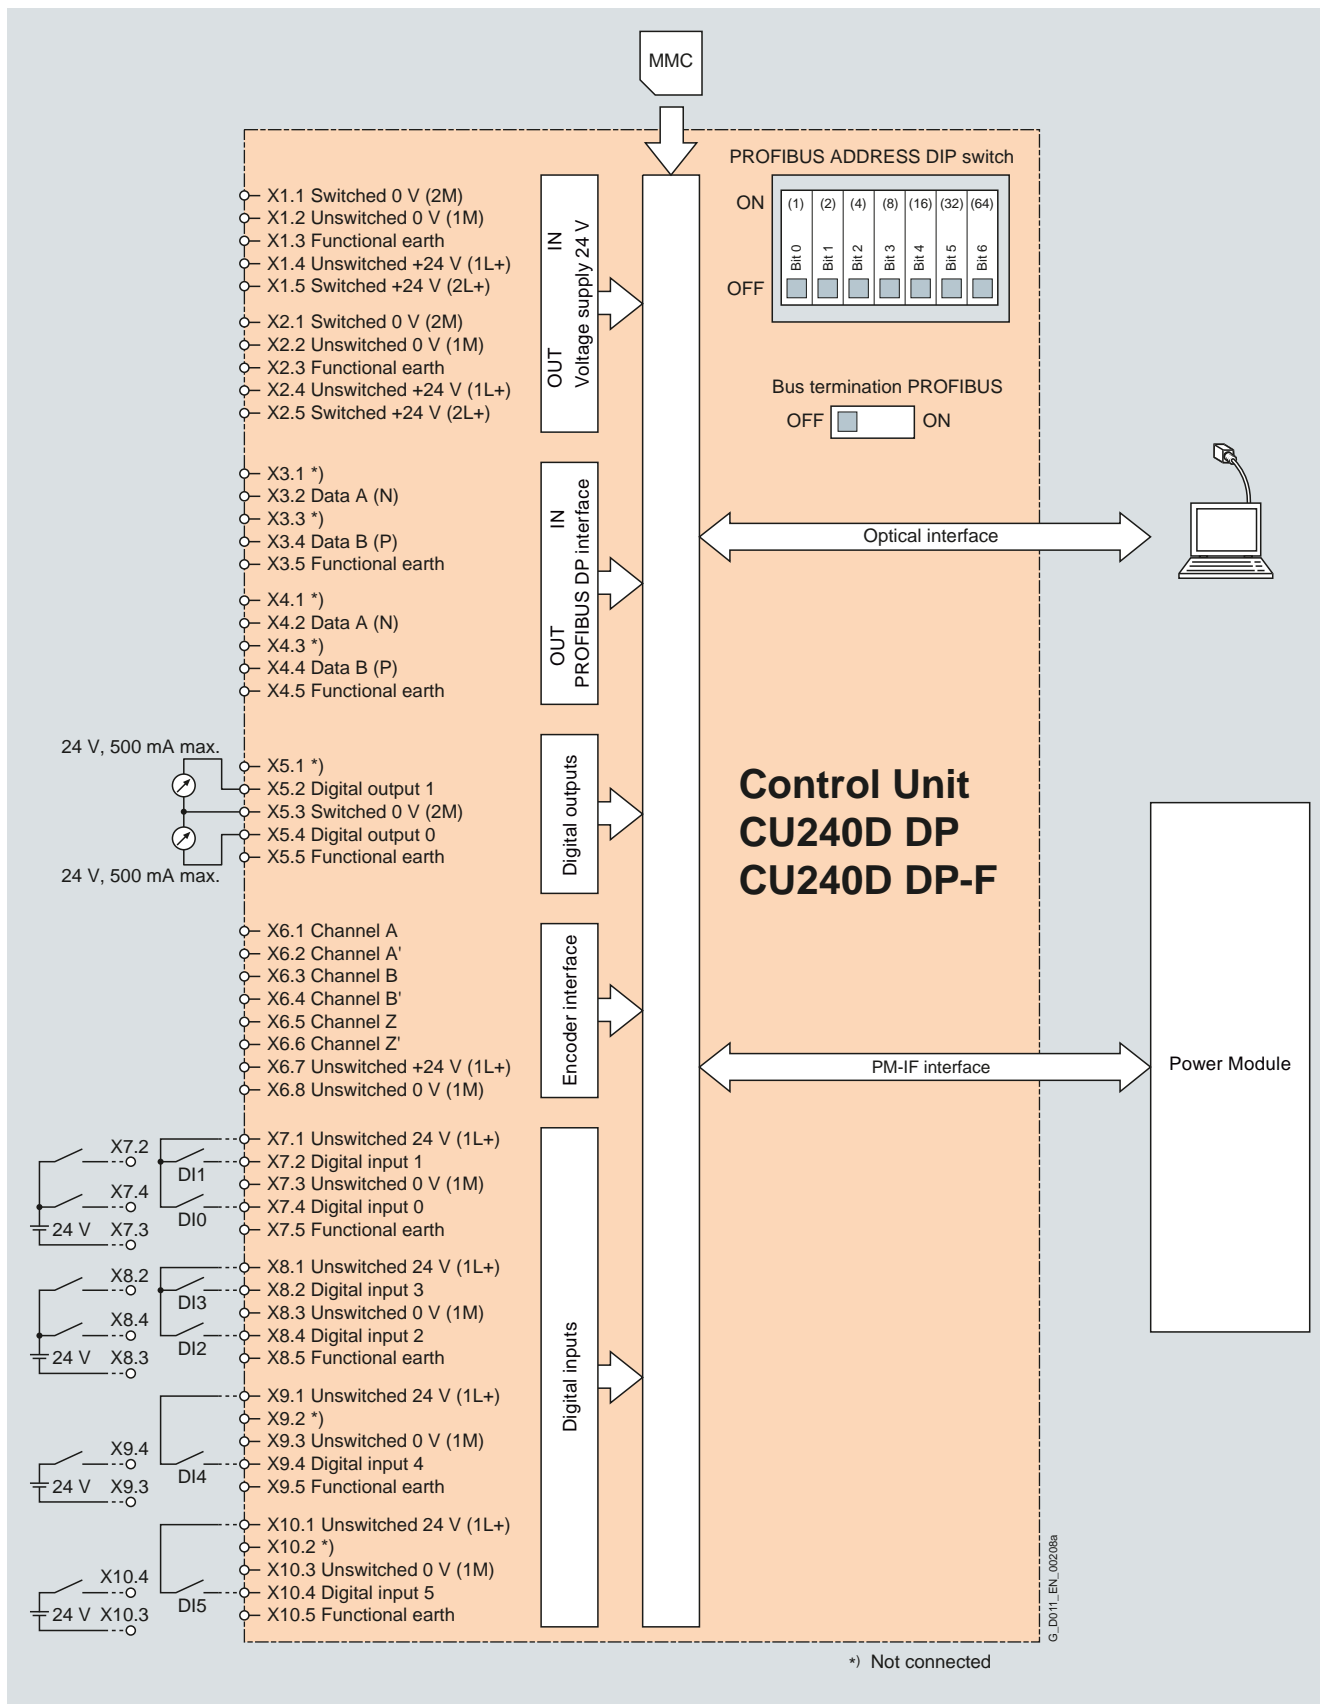


Connection diagram for CU240D DP and CU240D DP-F Control Units

SINAMICS G120D distributed inverters

0.75 kW to 7.5 kW (1.0 hp to 10 hp)


CU240D Control Units

Integration

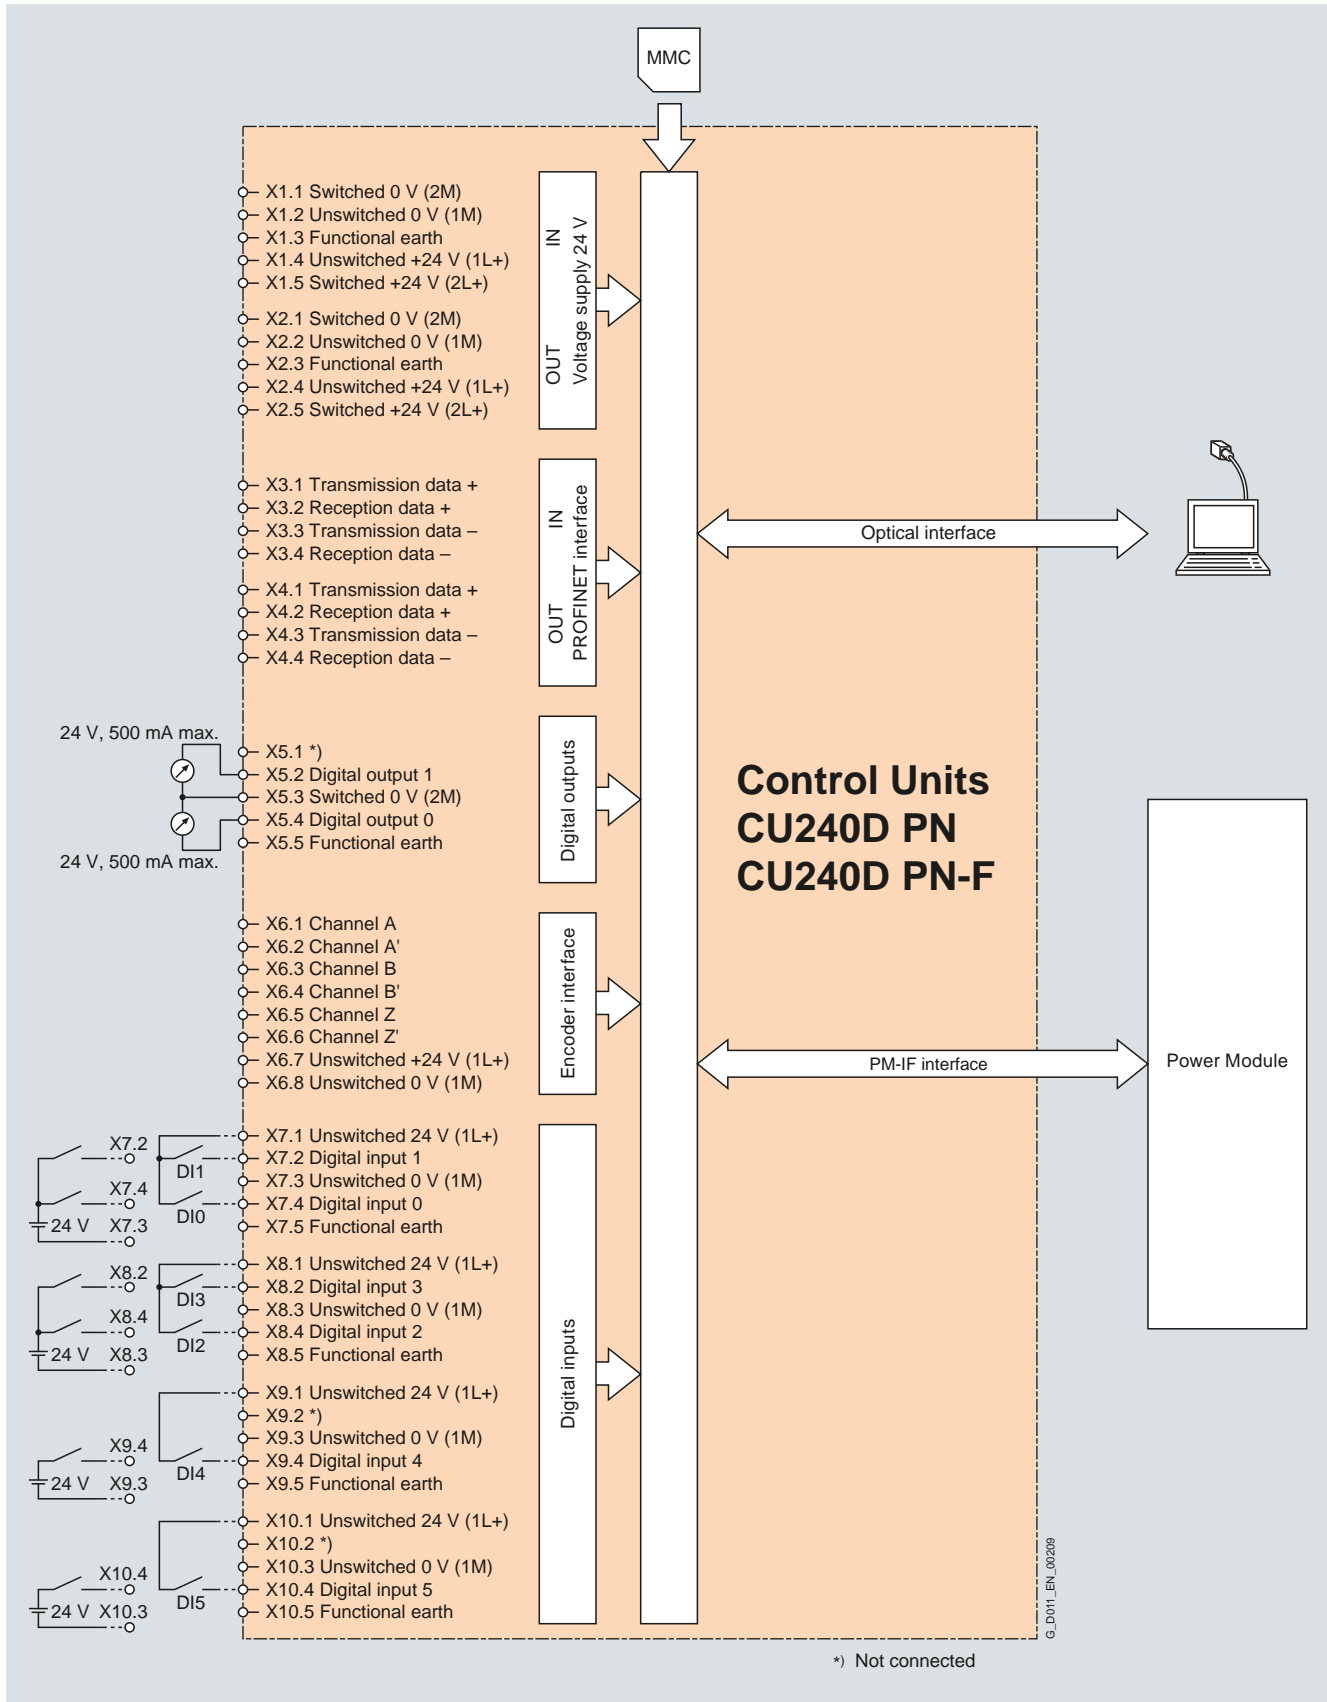

Connection diagram for CU240D PN and CU240D PN-F Control Units

Integration

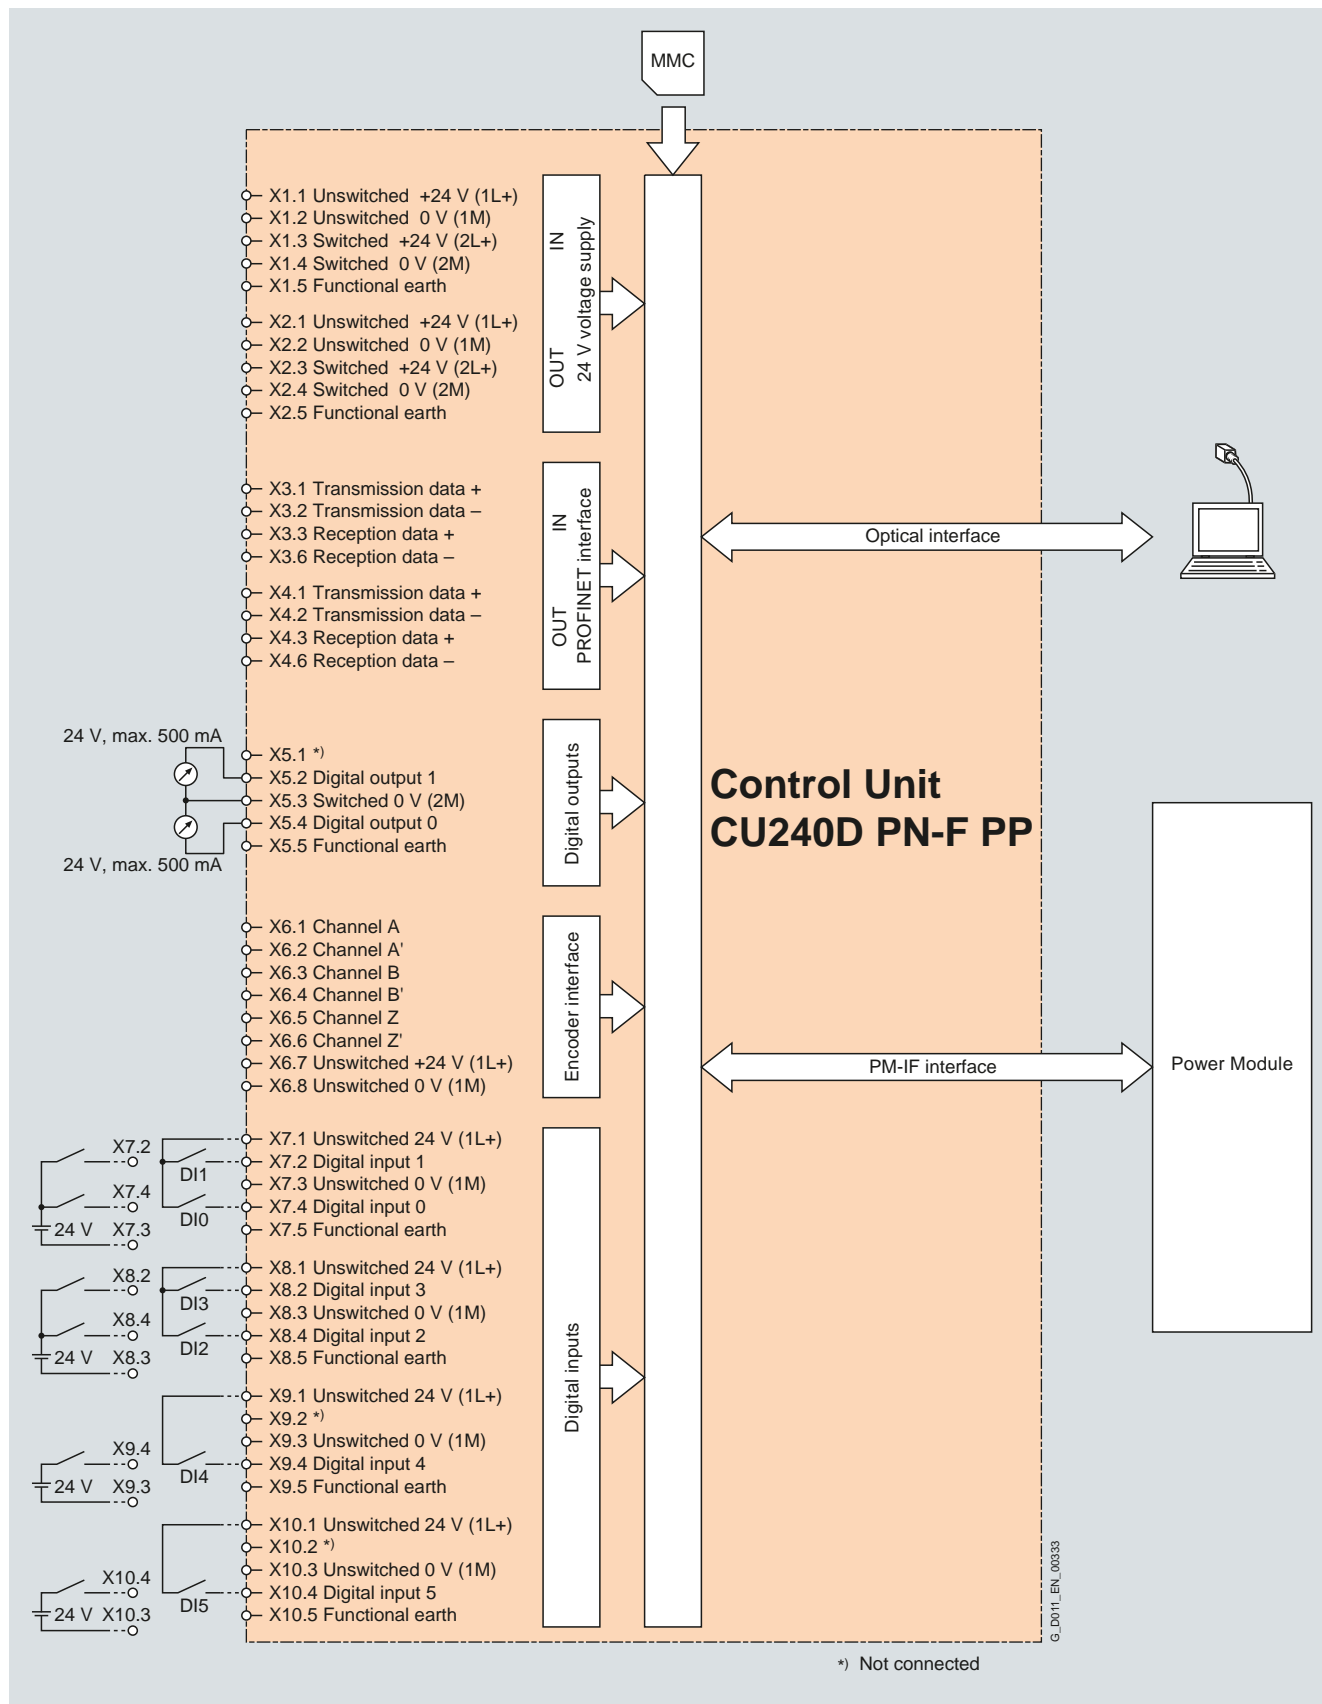

Connection diagram for CU240D PN-F PP Control Unit

SINAMICS G120D distributed inverters

0.75 kW to 7.5 kW (1.0 hp to 10 hp)

CU240D Control Units

Technical specifications

Control Unit	CU240D DP 6SL3544-0FA20-1PA0	CU240D PN 6SL3544-0FA20-1FA0	CU240D DP-F 6SL3544-0FA21-1PA0	CU240D PN-F 6SL3544-0FA21-1FA0 CU240D PN-F PP 6SL3544-0FA21-1FB0
Electrical specifications				
Operating voltage	External 24 V DC necessary	External 24 V DC necessary	External 24 V DC necessary	External 24 V DC necessary
Current consumption ¹⁾ (from the 24 V supply)				
• With Power Module frame sizes FSA and FSB	200 mA	350 mA	200 mA	350 mA
• With Power Module frame size FSC	350 mA	500 mA	350 mA	500 mA
Interfaces				
Digital inputs	6	6	6	6
Digital outputs (0.5 A, fed through switched 24 V DC)	2	2	2	2
Bus interface	PROFIBUS DP	PROFINET	PROFIBUS DP, PROFI-safe	PROFINET, PROFI-safe
Encoder interfaces (HTL incremental interface, bipolar up to 2048 pulses, max. 100 mA)	1	1	1	1
PTC/KTY interface (connection via Power Module)	✓	✓	✓	✓
• Motor temperature sensor	1 input, sensors that can be connected: PTC, KTY or Thermo-Click	1 input, sensors that can be connected: PTC, KTY or Thermo-Click	1 input, sensors that can be connected: PTC, KTY or Thermo-Click	1 input, sensors that can be connected: PTC, KTY or Thermo-Click
Control of a mechanical motor brake (connection via Power Module)	✓	✓	✓	✓
MMC memory card slot	✓	✓	✓	✓
RS232 interface (connected with RS232 interface cable or USB interface cable via the optical interface of the Control Unit)	✓	✓	✓	✓
Safety functions				
Integrated safety functions Acc. to Category 3 of EN 954-1 and SIL 2 of IEC 61508	–		<ul style="list-style-type: none"> • Safe Stop 1 (SS1) • Safely Limited Speed (SLS) • Safe Torque Off (STO) • The safety functions "Safely Limited Speed" and "Safe Stop 1" are not certified for pull-through loads such as hoisting gear and unwinders 	<ul style="list-style-type: none"> • Safe Stop 1 (SS1) • Safely Limited Speed (SLS) • Safe Torque Off (STO) • The safety functions "Safely Limited Speed" and "Safe Stop 1" are not certified for pull-through loads such as hoisting gear and unwinders

¹⁾ The current consumption of connected encoders and sensors (total, max. 300 mA) as well as the current drawn from the digital outputs must be added.

SINAMICS G120D distributed inverters

0.75 kW to 7.5 kW (1.0 hp to 10 hp)

CU240D Control Units

Technical specifications


Control Unit	CU240D DP 6SL3544-0FA20-1PA0	CU240D PN 6SL3544-0FA20-1FA0	CU240D DP-F 6SL3544-0FA21-1PA0	CU240D PN-F 6SL3544-0FA21-1FA0 CU240D PN-F PP 6SL3544-0FA21-1FB0
Open-loop/closed-loop control techniques				
V/f linear/square/parameterizable	✓	✓	✓	✓
V/f with flux current control (FCC)	✓	✓	✓	✓
Vector control, sensorless	✓	✓	✓	✓
Vector control, with sensor	✓	✓	✓	✓
Torque control, sensorless	✓	✓	✓	✓
Torque control, with sensor	✓	✓	✓	✓
Software functions				
Fixed frequencies	16, parameterizable	16, parameterizable	16, parameterizable	16, parameterizable
Signal interconnection with BICO technology	✓	✓	✓	✓
Automatic restart after line supply failure or operational fault	✓	✓	✓	✓
Positioning down ramp	✓	✓	✓	✓
Slip compensation	✓	✓	✓	✓
Free function blocks (FFB) for logical and arithmetic operations	✓	✓	✓	✓
Ramp smoothing	✓	✓	✓	✓
3 selectable drive data sets	✓	✓	✓	✓
3 selectable command data sets (CDS) (manual/auto)	✓	✓	✓	✓
Flying restart	✓	✓	✓	✓
JOG	✓	✓	✓	✓
Technology controller (PID)	✓	✓	✓	✓
Thermal motor protection	✓	✓	✓	✓
Thermal inverter protection	✓	✓	✓	✓
Setpoint input	✓	✓	✓	✓
Motor identification	✓	✓	✓	✓
Motor holding brake	✓	✓	✓	✓
Mechanical specifications and ambient conditions				
Degree of protection	IP65/UL Type 3	IP65/UL Type 3	IP65/UL Type 3	IP65/UL Type 3
Operating temperature	-10 ... +55 °C (14 ... 131 °F)	-10 ... +50 °C (14 ... 122 °F)	0 ... 55 °C (32 ... 131 °F)	0 ... 50 °C (32 ... 122 °F)
Storage temperature	-40 ... +70 °C (-40 ... +158 °F)	-40 ... +70 °C (-40 ... +158 °F)	-40 ... +70 °C (-40 ... +158 °F)	-40 ... +70 °C (-40 ... +158 °F)
Relative humidity	< 95 % RH, condensation not permissible	< 95 % RH, condensation not permissible	< 95 % RH, condensation not permissible	< 95 % RH, condensation not permissible
Dimensions				
• Width	150 mm (5.91 in)	150 mm (5.91 in)	150 mm (5.91 in)	150 mm (5.91 in)
• Height	210 mm (8.27 in)	210 mm (8.27 in)	210 mm (8.27 in)	210 mm (8.27 in)
• Depth	40 mm (1.57 in)	40 mm (1.57 in)	40 mm (1.57 in)	40 mm (1.57 in)
Weight, approx.	0.7 kg (1.5 lb)	0.7 kg (1.5 lb)	0.7 kg (1.5 lb)	0.7 kg (1.5 lb)

SINAMICS G120D distributed inverters

0.75 kW to 7.5 kW (1.0 hp to 10 hp)

PM250D Power Modules

Overview

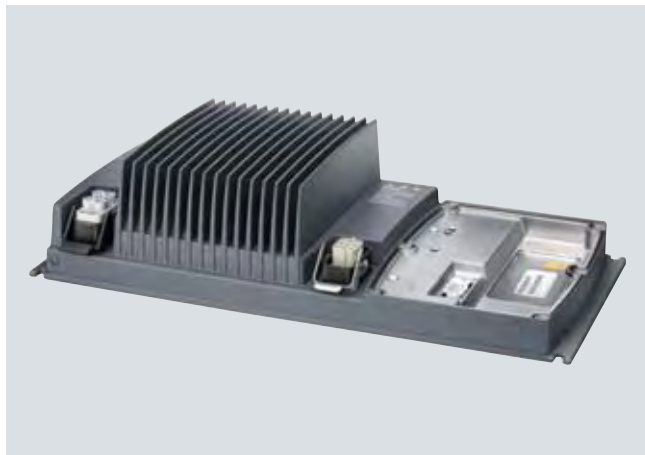

Example of PM250D Power Module, frame size FSA

The regenerative feedback capability of the PM250D Power Module in generating mode (electronic braking) means that energy is returned to the supply system and not wasted in a braking resistor. This saves space, time-consuming dimensioning of the braking resistor as well as its wiring. Generated heat is also reduced. [Additional information is included in chapter Highlights, section Efficient Infeed Technology.](#)

An innovative circuit design reduces the line harmonics. A line reactor is not required. This saves space and costs for engineering and procurement.

The PM250D Power Module is also designed for safety-oriented applications. In conjunction with a fail-safe Control Unit, the drive can be transformed into a Safety Integrated Drive ([see Control Units](#)).

The PM250D Power Modules with integrated line filter class A are suitable for connection to TN and TT supply systems.

Selection and ordering data

Rated power ¹⁾		Rated output current ²⁾	Input current	Frame size	PM250D Power Module with integrated line filter class A Order No.
kW	hp				
380 ... 500 V 3 AC					
0.75	1	2.2	2.1	FSA	6SL3525-0PE17-5AA1
1.5	1.5 ³⁾	4.1	3.8	FSA	6SL3525-0PE21-5AA1
3	4	7.7	7.2	FSB	6SL3525-0PE23-0AA1
4	5	10.2	9.5	FSC	6SL3525-0PE24-0AA1
5.5	7.5	13.2	12.2	FSC	6SL3525-0PE25-5AA1
7.5	10	19.0	17.7	FSC	6SL3525-0PE27-5AA1

¹⁾ Rated power based on the rated output current I_{rated} . The rated output current I_{rated} is based on the duty cycle for high overload (HO).

²⁾ The rated output current I_{rated} is based on the duty cycle for high overload (HO). These current values are valid for 400 V and are specified on the rating plate of the Power Module.

³⁾ It is not possible to make any assignment to a particular standard.

SINAMICS G120D distributed inverters

0.75 kW to 7.5 kW (1.0 hp to 10 hp)


PM250D Power Modules

Integration

PM250D Power Modules communicate with the Control Unit via the PM-IF interface.

PM250D Power Modules have the following interfaces as standard:

- PM-IF interface to connect the PM250D Power Module to the Control Unit.
- Motor connection via a HAN Q8 (connector) including control of the motor brake and temperature sensor
- Line supply connection via HAN Q4/2 (socket)

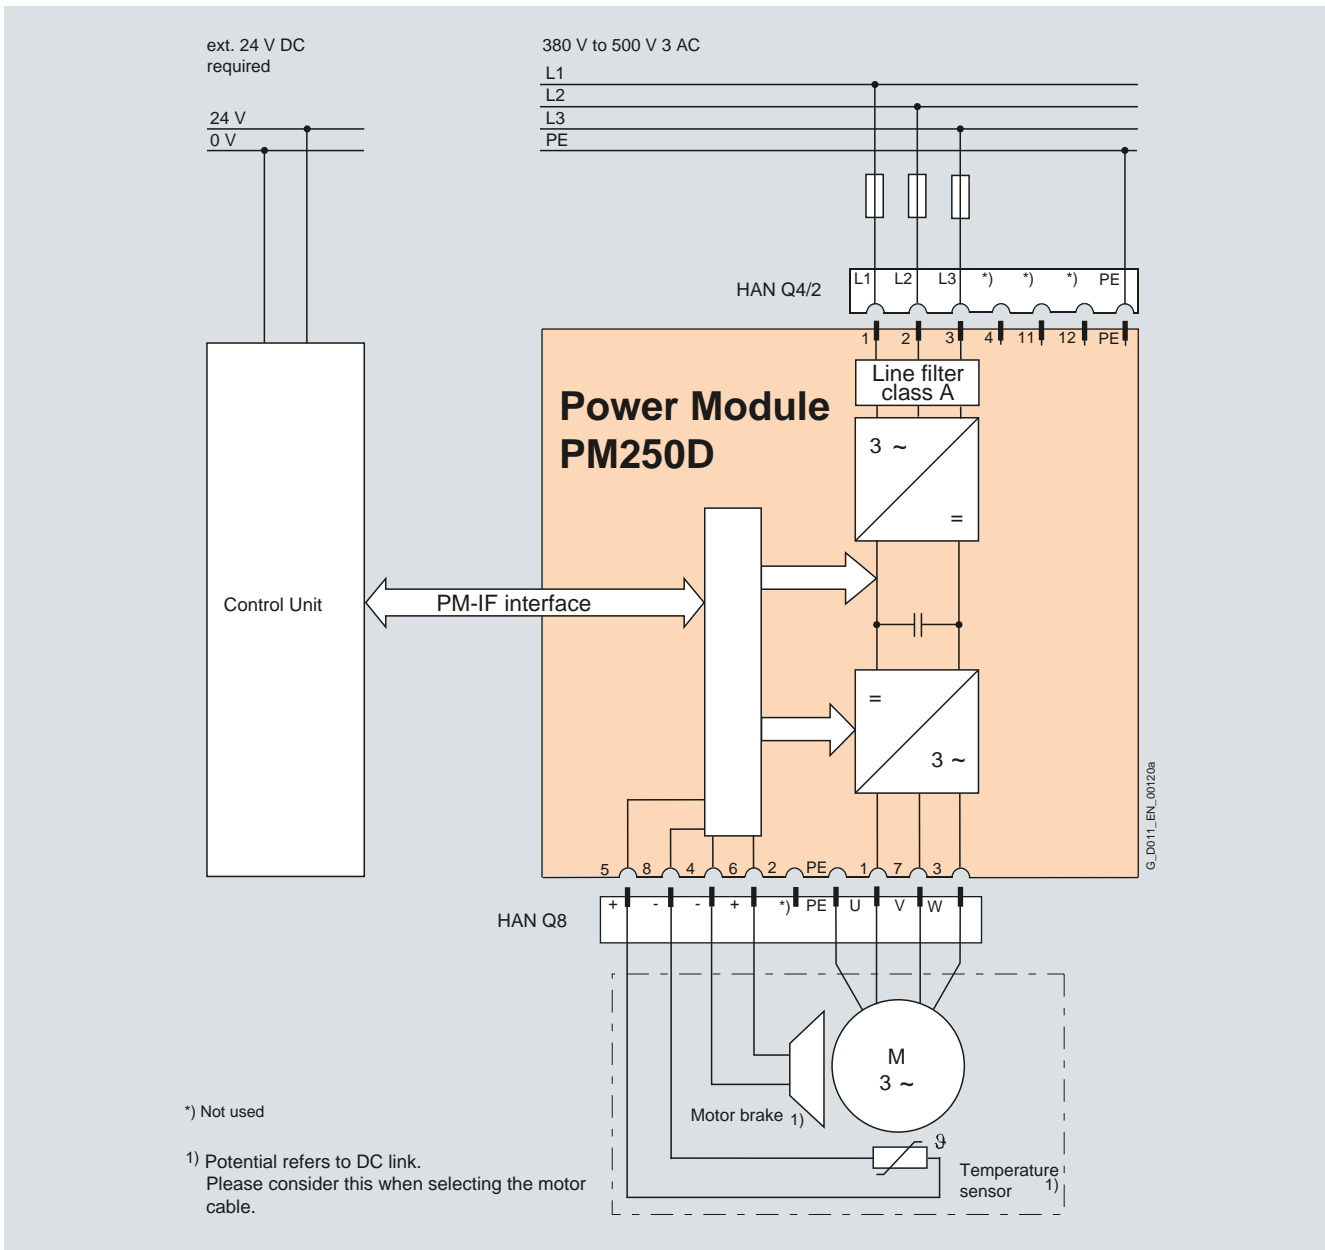

Connection diagram for PM250D Power Module with integrated line filter class A

SINAMICS G120D distributed inverters

0.75 kW to 7.5 kW (1.0 hp to 10 hp)

PM250D Power Modules

Technical specifications

General technical specifications

	PM250D Power Modules					
System operating voltage	380 ... 500 V 3 AC $\pm 10\%$					
Line supply requirements	$\leq 1\%$					
Line short circuit voltage u_K						
Input frequency	47 ... 63 Hz					
Output frequency						
• Control type V/f	0 ... 650 Hz					
• Control type Vector	0 ... 200 Hz					
Pulse frequency	4 kHz (standard), for higher pulse frequencies up to 16 kHz, see derating data					
Power factor	0.95					
Inverter efficiency	95 ... 97 %					
Output voltage, max.	0 ... 87 % of input voltage					
Overload capability						
• High overload (HO)	<ul style="list-style-type: none"> • Average maximum rated output current during a cycle time of 300 s • 1.5 \times rated output current (i.e. 150 % overload) over 60 s at a cycle time of 300 s • 2 \times rated output current (i.e. 200 % overload) over 3 s at a cycle time of 300 s 					
Electromagnetic compatibility	Integrated line filter class A according to EN 55011					
Possible braking methods	Energy recovery in regenerative mode (max. with rated power possible); Integrated brake control supplies the DC supply voltage for the brake					
	Line input voltage	380 V AC	400 V AC	440 V AC	480 V AC	500 V AC
	Resulting brake voltage	171 V DC	180 V DC	198 V DC	216 V DC	225 V DC
	Disconnection on the DC permits "fast" braking (max. output current 1 A)					
Degree of protection	IP65/UL Type 3					
Operating temperature	-10 ... +55 °C (14 ... 131 °F) (operating temperature ranges of the Control Units should be taken into account)					
Storage temperature	-40 ... +70 °C (-40 ... +158 °F)					
Permissible mounting position	Horizontal wall mounting and mounting in the horizontal position					
Relative humidity	< 95 % RH, condensation not permissible					
Cooling	FSA and FSB: Convection FSC: Air cooling as required using the integrated fan					
Installation altitude	Up to 1000 m (3281 ft) above sea level without derating, > 1000 m (3281 ft) see derating characteristics					
Standard SCCR (Short Circuit Current Rating) ¹⁾	40 kA					
Protection functions	<ul style="list-style-type: none"> • Undervoltage • Overvoltage • Overcontrol/Overload • Ground fault • Short-circuit • Stall protection • Motor blocking protection • Motor overtemperature • Inverter overtemperature • Parameter locking 					
Compliance with standards	UL 508C (UL list number E121068), cUL, CE, c-tick					
CE marking, according to	Low-Voltage Directive 2006/95/EC					

¹⁾ Applies to industrial control cabinet installations to NEC Article 409/UL 508A.

SINAMICS G120D distributed inverters

0.75 kW to 7.5 kW (1.0 hp to 10 hp)

PM250D Power Modules

Technical specifications

Line voltage 380 ... 500 V 3 AC	PM250D Power Modules		
	6SL3525-0PE17-5AA1	6SL3525-0PE21-5AA1	6SL3525-0PE23-0AA1
Rated output current I_{rated} ¹⁾ A	2.2	4.1	7.7
Output current I_{max} A	4.4	8.2	15.4
Rated power kW (hp)	0.75 (1.0)	1.5 (1.5) ³⁾	3 (4.0)
Rated pulse frequency kHz	4	4	4
Efficiency η %	0.97	0.97	0.97
Power loss kW	0.047	0.061	0.103
Cooling air requirement m ³ /s (ft ³ /s)	0.004 (0.14)	0.005 (0.18)	0.009 (0.32)
Sound pressure level L_{pA} (1 m) dB	–	–	–
Rated input current ²⁾ A	2.1	3.8	7.2
Line supply connection U1/L1, V1/L2, W1/L3, PE	HAN Q4/2 (connector)	HAN Q4/2 (connector)	HAN Q4/2 (connector)
• Conductor cross-section mm ²	1.5 ... 6	1.5 ... 6	2.5 ... 6
Motor connection U2, V2, W2, PE, motor brake, temperature sensor	HAN Q8 (socket)	HAN Q8 (socket)	HAN Q8 (socket)
• Conductor cross-section mm ²	1 ... 4	1 ... 4	2.5 ... 4
Motor cable length, max. m (ft)	15 (49)	15 (49)	15 (49)
Degree of protection	IP65/UL Type 3	IP65/UL Type 3	IP65/UL Type 3
Dimensions			
• Width mm (in)	445 (17.52)	445 (17.52)	445 (17.52)
• Height mm (in)	210 (8.27)	210 (8.27)	210 (8.27)
• Depth mm (in)	110 (4.33)	110 (4.33)	180 (7.09)
Frame size	FSA	FSA	FSB
Weight, approx. kg (lb)	5.7 (12.6)	5.7 (12.6)	8 (17.6)

¹⁾ The rated output current I_{rated} is based on the duty cycle for high overload (HO).

²⁾ The input current depends on the motor load and line impedance. The input currents apply for load at rated power for a line impedance corresponding to $u_K = 1\%$.

³⁾ It is not possible to make any assignment to a particular standard.

SINAMICS G120D distributed inverters

0.75 kW to 7.5 kW (1.0 hp to 10 hp)

PM250D Power Modules

Technical specifications

Line voltage 380 ... 500 V 3 AC	PM250D Power Modules		
	6SL3525-0PE24-0AA1	6SL3525-0PE25-5AA1	6SL3525-0PE27-5AA1
Rated output current $I_{\text{rated}}^{1)}$ A	10.2	13.2	19
Output current I_{max} A	20.4	26.4	38
Rated power kW (hp)	4 (5)	5.5 (7.5)	7.5 (10)
Rated pulse frequency kHz	4	4	4
Efficiency η %	0.97	0.97	0.97
Power loss kW	0.141	0.209	0.295
Cooling air requirement m^3/s (ft^3/s)	0.012 (0.42)	0.018 (0.64)	0.025 (0.88)
Sound pressure level L_{pA} (1 m) dB	74.5	74.5	74.5
Rated input current $I^{2)}$ A	9.5	12.2	17.7
Line supply connection U1/L1, V1/L2, W1/L3, PE	HAN Q4/2 (connector)	HAN Q4/2 (connector)	HAN Q4/2 (connector)
• Conductor cross-section mm^2	2.5 ... 6	4 ... 6	4 ... 6
Motor connection U2, V2, W2, PE, motor brake, temperature sensor	HAN Q8 (socket)	HAN Q8 (socket)	HAN Q8 (socket)
• Conductor cross-section mm^2	2.5 ... 4	4	4
Motor cable length, max. m (ft)	15 (49)	15 (49)	15 (49)
Degree of protection	IP65/UL Type 3	IP65/UL Type 3	IP65/UL Type 3
Dimensions			
• Width mm (in)	445 (17.52)	445 (17.52)	445 (17.52)
• Height mm (in)	210 (8.27)	210 (8.27)	210 (8.27)
• Depth mm (in)	220 (8.66)	220 (8.66)	220 (8.66)
Frame size	FSC	FSC	FSC
Weight, approx. kg (lb)	8.5 (18.7)	8.5 (18.7)	8.5 (18.7)

¹⁾ The rated output current I_{rated} is based on the duty cycle for high overload (HO).

²⁾ The input current depends on the motor load and line impedance.
The input currents apply for load at rated power for a line impedance corresponding to $u_k = 1\%$.

SINAMICS G120D distributed inverters

0.75 kW to 7.5 kW (1.0 hp to 10 hp)

PM250D Power Modules


Characteristic curves

Derating data

Pulse frequency

Rated power at 400 V 3 AC		Rated output current in A for a pulse frequency of						
kW	hp	4 kHz	6 kHz	8 kHz	10 kHz	12 kHz	14 kHz	16 kHz
0.75	1.0	2.2	1.9	1.5	1.3	1.1	1.0	0.9
1.5	1.5 ¹⁾	4.1	3.5	2.9	2.5	2.1	1.8	1.6
3.0	4.0	7.7	6.5	5.4	4.6	3.9	3.5	3.1
4.0	5.0	10.2	8.7	7.1	6.1	5.1	4.6	4.1
5.5	7.5	13.2	11.2	9.2	7.9	6.6	5.9	5.3
7.5	10	19	16.2	13.3	11.4	9.5	8.6	7.6

Ambient temperature

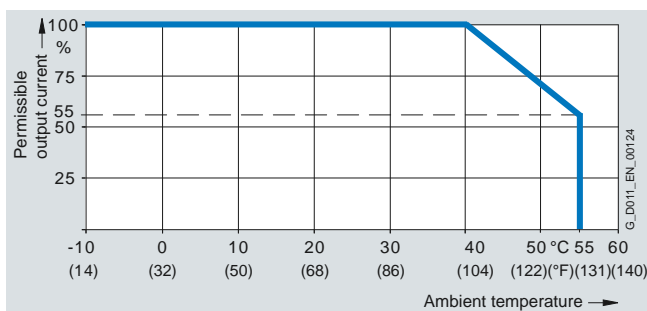


Permissible output current as a function of ambient temperature for PM250D Power Modules, frame sizes FSA to FSC


Note:

The operating temperature ranges of the Control Units should be taken into account. [The temperature ranges are specified in the technical specifications under Control Units.](#)

Installation altitude

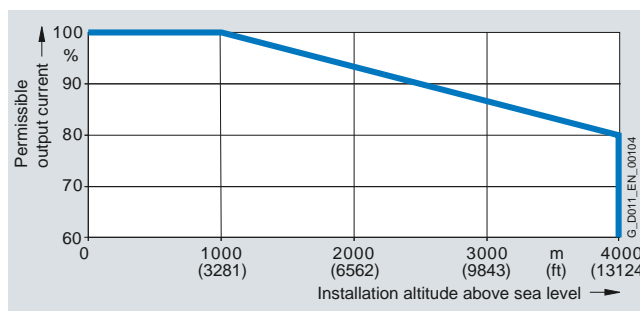

Permissible output current as a function of installation altitude for PM250D Power Modules, frame sizes FSA to FSC

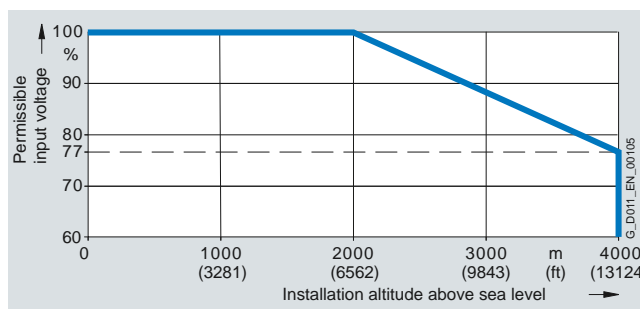

Permissible input current as a function of installation altitude for PM250D Power Modules, frame sizes FSA to FSC




¹⁾ It is not possible to make any assignment to a particular standard.

SINAMICS G120D distributed inverters

0.75 kW to 7.5 kW (1.0 hp to 10 hp)


PM250D Power Modules

Dimensional drawings

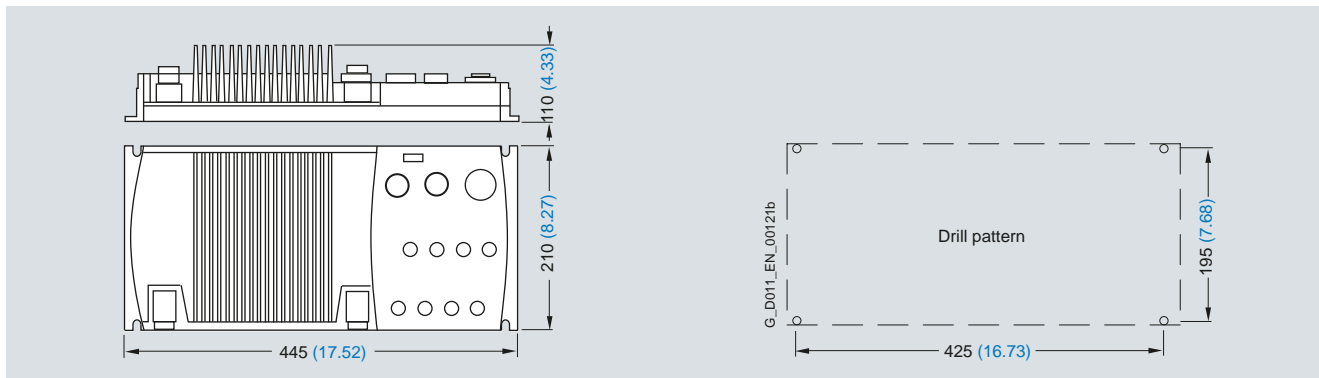


PM250D Power Module, frame size FSA, with integrated line filter class A and plugged-in Control Unit

If the CU240D PN-F PP Control Unit is used, the height increases to 128.3 mm (5.05 inches).

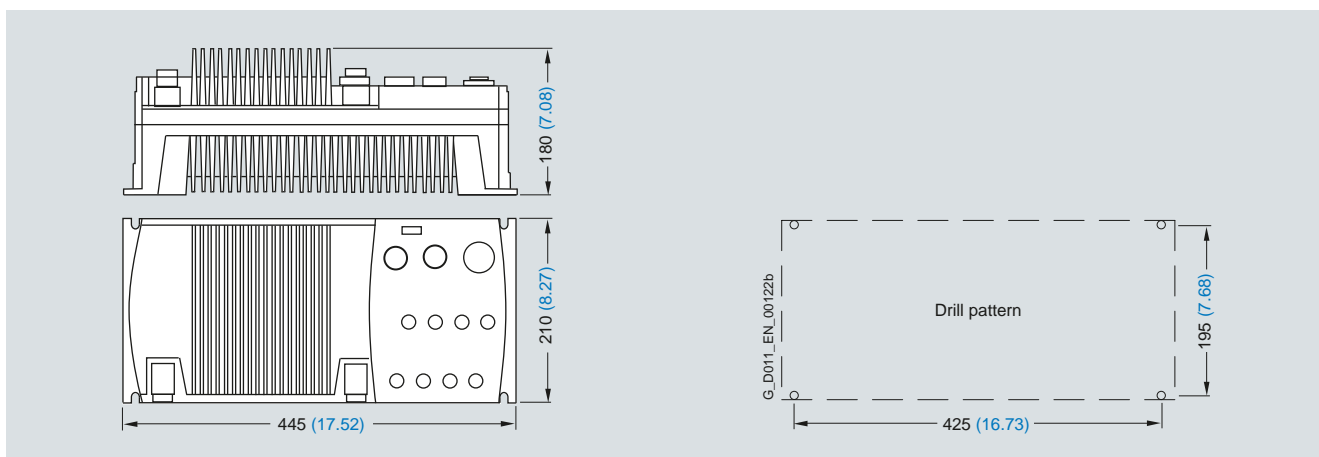

PM250D Power Module, frame size FSB, with integrated line filter class A and plugged-in Control Unit

If the CU240D PN-F PP Control Unit is used, the height increases to 198.3 mm (7.81 inches).

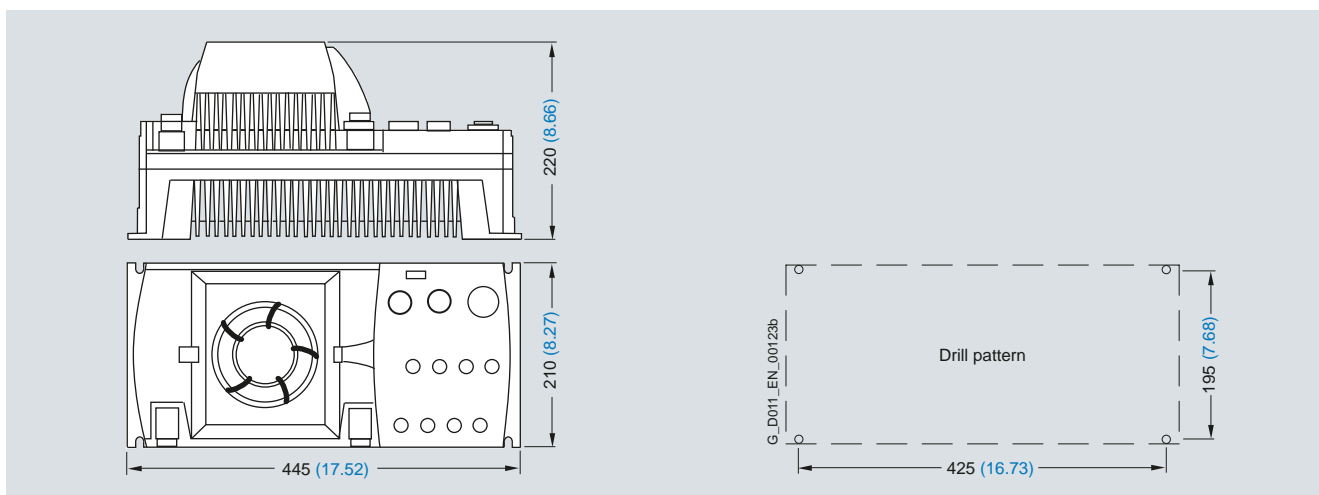

PM250D Power Module, frame size FSC, with integrated line filter class A and plugged-in Control Unit

Mounted with M5 or M6 screwed joints with a maximum washer diameter of 12 mm (0.47 inches).

3 mm (0.12 inch) allen screw for the Control Unit.

Ventilation clearance required (for wall mounting) at top and bottom: 150 mm (5.9 inches).

All dimensions in mm (values in brackets are in inches).

SINAMICS G120D distributed inverters

0.75 kW to 7.5 kW (1.0 hp to 10 hp)

Recommended line-side power components

Selection and ordering data

The following table lists recommendations for additional line-side components, such as fuses and circuit breakers (line-side components dimensioned in accordance with IEC standards). The specified circuit breakers are UL-certified. 3NA3 fuses are recommended for European countries.

Furthermore, only contactors complying with the utilization category AC-3 (according to IEC 60947-4-1) may be used. The values in the table take into account the overload capability of the inverter.

Fuses for use in North America must be UL-certified, such as the Class NON fuse series from Bussmann or approved circuit breakers from the SIRIUS 3RV and SENTRON 3VL series according to UL 489 (category control number CCN: DiV Q).

[Additional information about the listed fuses and circuit breakers can be found in Catalogs LV 1 AO, LV 10.1 and IC 10.](#)

Individual protection

Rated power		SINAMICS G120D PM250D Power Modules		Protection	Fuse	Circuit breaker
kW	hp	Type 6SL3525-...	Frame size	A	Order No.	Order No.
380 ... 500 V 3 AC						
0.75	1	0PE17-5AA1	FSA	10	3NA3803	3RV1021-1FA10
1.5	1.5 ¹⁾	0PE21-5AA1	FSA	10	3NA3803	3RV1021-1JA10
3	4	0PE23-0AA1	FSB	16	3NA3805	3RV1021-4AA10
4	5	0PE24-0AA1	FSC	20	3NA3807	3RV1021-4BA10
5.5	7.5	0PE25-5AA1	FSC	20	3NA3807	3RV1031-4EA10
7.5	10	0PE27-5AA1	FSC	32	3NA3812	3RV1031-4FA10

¹⁾ It is not possible to make any assignment to a particular standard.

SINAMICS G120D distributed inverters

0.75 kW to 7.5 kW (1.0 hp to 10 hp)

Supplementary system components

Accessories

Intelligent Operator Panel IOP Handheld



IOP Handheld for mobile use

The Intelligent Operator Panel IOP Handheld is a very user-friendly and powerful operator panel for commissioning and diagnostics as well as local operator control and monitoring of the SINAMICS G120D distributed inverter.

The IOP supports both entry-level personnel and drive experts. Thanks to the large plain text display, the menu-based operation and the application wizards, it is easy to commission standard drives. A drive can be essentially commissioned without having to use a printed parameter list – as the parameters are displayed in plain text, and explanatory help texts and the parameter filtering function are provided.

Application wizards interactively guide you when commissioning important applications such as conveyor technology, pumps, fans and compressors.

There are quick commissioning wizards for general commissioning.

The drives are easily controlled manually using directly assigned buttons and the navigation wheel. The IOP Handheld has a dedicated switchover button to switch over from automatic to manual mode.

The inverter can be diagnosed in a user-friendly fashion using the plain text display of faults and alarms. Help texts can be obtained by pressing the INFO button.

Up to two process values can be displayed graphically or numerically on the status screen/status display.

Process values can also be displayed in technological units.

The IOP Handheld supports standard commissioning of identical drives. For this purpose, a parameter list can be copied from an inverter into the IOP Handheld and downloaded into other drive units of the same type as required.

The IOP Handheld includes the following language packages: English, French, German, Italian and Spanish.

In addition to the IOP, the IOP Handheld includes a housing with the rechargeable batteries, charging unit and RS232 connecting cable. The charging unit is supplied with connector adapters for Europe, the US and UK. When the batteries are fully charged, the operating time is up to 8 hours.

To connect the IOP Handheld to SINAMICS G120D, the RS232 connecting cable with optical interface is required in addition.

Updating the IOP Handheld

The IOP Handheld can be updated and expanded using the integrated USB interface.

Data to support future drive systems can be transferred from the PC to the IOP Handheld via drag & drop. Further, the USB interface allows user languages and wizards that will become available in the future to be subsequently downloaded and the firmware to be updated for the IOP Handheld.

The IOP is supplied with power via the USB interface during an update.

Selection and ordering data

Description	Order No.
IOP Handheld For use with SINAMICS G120, SINAMICS G120C, SINAMICS G110D, SINAMICS G120D, SIMATIC ET 200S FC or SIMATIC ET 200pro FC Included in the scope of delivery: <ul style="list-style-type: none"> • Intelligent Operator Panel IOP • Handheld housing • Rechargeable batteries (4 × AA) • Charging unit (international) • RS232 connecting cable (3 m/9.84 ft long, can only be used for SINAMICS G120 and SIMATIC ET 200S FC) • USB cable (1 m/3.28 ft long) 	6SL3255-0AA00-4HA0
RS232 connecting cable With optical interface to connect the SINAMICS G110D, SINAMICS G120D or SIMATIC ET 200pro FC inverters to the IOP Handheld (2.5 m/8.2 ft long)	3RK1922-2BP00

SINAMICS G120D distributed inverters

0.75 kW to 7.5 kW (1.0 hp to 10 hp)

Supplementary system components

Accessories

SINAMICS micro memory card (MMC)



The parameter settings for an inverter can be stored on the SINAMICS micro memory card (MMC). When service is required, e.g. after the inverter has been replaced and the data have been downloaded from the memory card the drive system is immediately ready for use again.

Selection and ordering data

Description	Order No.
SINAMICS micro memory card (MMC)	6SL3254-0AM00-0AA0

RS232 interface cable for communication with a PC

For controlling and commissioning an inverter directly from a PC via a point-to-point connection if the appropriate software (STARTER commissioning tool¹⁾, V4.1, SP1 and higher) has been installed.

Selection and ordering data

Description	Order No.
RS232 interface cable For communication with a PC	3RK1922-2BP00

USB interface cable for communication with a PC

For controlling and commissioning an inverter directly from a PC via a point-to-point connection if the appropriate software (STARTER commissioning tool¹⁾, V4.1, SP1 and higher) has been installed.

Selection and ordering data

Description	Order No.
USB interface cable For communication with a PC (2.5 m/8.2 ft long)	6SL3555-0PA00-2AA0

STARTER commissioning tool

The STARTER commissioning tool (V4.1, SP1 and higher) supports the commissioning and maintenance of SINAMICS G120D inverters. The operator guidance combined with comprehensive, user-friendly functions for the relevant drive solution allow you to commission the device quickly and easily.

Selection and ordering data

Description	Order No.
STARTER commissioning tool¹⁾ On DVD-ROM	6SL3072-0AA00-0AG0

¹⁾ The STARTER commissioning tool is also available on the Internet at <http://support.automation.siemens.com/WW/view/en/10804985/133100>

SINAMICS G120D distributed inverters

0.75 kW to 7.5 kW (1.0 hp to 10 hp)

Supplementary system components

Accessories

Connecting cables for the Control Unit

PROFINET connecting cables

Flexible connecting cables and plug-in connectors that can be assembled in the field for transmission of data (up to 100 Mbit/s) between industrial Ethernet stations with IP65 degree of protection.

Selection and ordering data

Description	Order No.
IE connecting cable M12-180/M12-180 Pre-assembled IE FC TP trailing cable GP 2 x 2 PROFINET type C) with two 4-pole M12 plugs (4-pole, D-coded), IP65/IP67 degree of protection, UL Length: <ul style="list-style-type: none"> • 0.3 m (0.98 ft) • 0.5 m (1.64 ft) • 1.0 m (3.28 ft) • 1.5 m (4.92 ft) • 2.0 m (6.56 ft) • 3.0 m (9.84 ft) • 5.0 m (16.41 ft) • 10 m (32.81 ft) • 15 m (49.22 ft) 	6XV1870-8AE30 6XV1870-8AE50 6XV1870-8AH10 6XV1870-8AH15 6XV1870-8AH20 6XV1870-8AH30 6XV1870-8AH50 6XV1870-8AN10 6XV1870-8AN15
IE M12 Plug PRO For assembly in the field, M12 plug-in connector (D-coded), metal enclosure, UL, fast connection method for SCALANCE X208PRO and IM 154-4 PN <ul style="list-style-type: none"> • 1 unit • 8 units • 1 unit (angled) 	6GK1901-0DB20-6AA0 6GK1901-0DB20-6AA8 3RK1902-2DA00
RJ45 PLUG PRO connector For on-site assembly for CU240D PN-F PP Control Unit, UL 1 package = 1 unit <ul style="list-style-type: none"> • 1 unit 	6GK1901-1BB10-6AA0

PROFIBUS connecting cables

Flexible plug-in cables/connectors for transmission of data (up to 12 Mbit/s) from PROFIBUS stations

Selection and ordering data

Description	Order No.
PROFIBUS M12 plug-in cable Pre-assembled with two 5-pole M12 plug/socket connectors, UL Length: <ul style="list-style-type: none"> • 0.3 m (0.98 ft) • 0.5 m (1.64 ft) • 1.0 m (3.28 ft) • 1.5 m (4.92 ft) • 2.0 m (6.56 ft) • 3.0 m (9.84 ft) • 5.0 m (16.41 ft) • 10 m (32.81 ft) • 15 m (49.22 ft) 	6XV1830-3DE30 6XV1830-3DE50 6XV1830-3DH10 6XV1830-3DH15 6XV1830-3DH20 6XV1830-3DH30 6XV1830-3DH50 6XV1830-3DN10 6XV1830-3DN15
PROFIBUS M12 connector 5-pole, B-coded, metal enclosure, 1 package = 5 units <ul style="list-style-type: none"> • Pin insert • Female contact insert 	6GK1905-0EA00 6GK1905-0EB00

Connecting cables/connectors for supplying the Control Unit with power

Selection and ordering data

Description	Order No.
7/8" plug-in cable For power supply, pre-assembled with two 5-pole 7/8" plug/socket connectors, UL, 5 x 1.5 mm ² Length: <ul style="list-style-type: none"> • 0.3 m (0.98 ft) • 0.5 m (1.64 ft) • 1.0 m (3.28 ft) • 1.5 m (4.92 ft) • 2.0 m (6.56 ft) • 3.0 m (9.84 ft) • 5.0 m (16.41 ft) • 10 m (32.81 ft) • 15 m (49.22 ft) 	6XV1822-5BE30 6XV1822-5BE50 6XV1822-5BH10 6XV1822-5BH15 6XV1822-5BH20 6XV1822-5BH30 6XV1822-5BH50 6XV1822-5BN10 6XV1822-5BN15
7/8" connector 5-pole, B-coded, plastic enclosure, 1 package = 5 units <ul style="list-style-type: none"> • Pin insert (IN) • Female contact insert (OUT) 	6GK1905-0FA00 6GK1905-0FB00
POWER PLUG PRO connector For the CU240D PN-F PP 5-pole push-pull power connector for on-site assembly 1 package = 1 unit <ul style="list-style-type: none"> • 1 unit 	6GK1907-0AB10-6AA0

Connecting cables and connectors for digital inputs

Selection and ordering data

Description	Order No.
M12 plug-in cable With PUR sheath, to connect digital sensors and actuators, pre-assembled at one end, angled, plug connector, 5-pole, 5 x 0.34 mm ² , UL Length: <ul style="list-style-type: none"> • 1.5 m (4.92 ft) • 5.0 m (16.41 ft) • 10 m (32.81 ft) 	3RK1902-4HB15-5AA0 3RK1902-4HB50-5AA0 3RK1902-4HC01-5AA0
M12 connector For screw mounting, 5-pole screw-type connection max. 0.75 mm ² , A-coded, max. 4 A, UL <ul style="list-style-type: none"> • Straight • Angled 	3RK1902-4BA00-5AA0 3RK1902-4DA00-5AA0

SINAMICS G120D distributed inverters

0.75 kW to 7.5 kW (1.0 hp to 10 hp)

Supplementary system components

Accessories

Connecting cables for Power Modules

Connecting cables pre-assembled at one end and connector sets to connect to the line supply

Selection and ordering data

Description	Order No.
Connecting cable pre-assembled at one end Power supply cable, open at one end, for HAN Q4/2, angled, 4 × 4 mm ²	
• 1.5 m (4.92 ft) long	3RK1911-0DB13
• 5 m (16.41 ft) long	3RK1911-0DB33
Connector set for the power supply HAN Q4/2	
• 2.5 mm ²	3RK1911-2BE50
• 4 mm ²	3RK1911-2BE10
• 6 mm ²	3RK1911-2BE30

Motor cables pre-assembled at one end and connector sets to connect the Power Module to the motor

Selection and ordering data

Motor cables pre-assembled at one end For motors with brake and temperature sensor with HAN Q8 connector, shielded	Order No.		
	(HTG: supplied by Harting) (ZKT: supplied by KnorrTec)		
Cross-section	4 × 1.5 mm ² 2 × (2 × 0.75 mm ²)	4 × 2.5 mm ² 2 × (2 × 0.75 mm ²)	4 × 4 mm ² 2 × 1 mm ² + 2 × 1.5 mm ²
• 1.5 m (4.92 ft) long	HTG: 61 88 201 0288 ZKT: 70020501000150	HTG: 61 88 201 0291 ZKT: 70009601000150	HTG: 61 88 201 0303 ZKT: 70017001000150
• 3 m (9.84 ft) long	HTG: 61 88 201 0289 ZKT: 70020501000300	HTG: 61 88 201 0292 ZKT: 70009601000300	HTG: 61 88 201 0304 ZKT: 70017001000300
• 5 m (16.41 ft) long	HTG: 61 88 201 0290 ZKT: 70020501000500	HTG: 61 88 201 0293 ZKT: 70009601000500	HTG: 61 88 201 0305 ZKT: 70017001000500
• 10 m (32.81 ft) long	HTG: 61 88 201 0299 ZKT: 70020501001000	HTG: 61 88 201 0301 ZKT: 70009601001000	HTG: 61 88 201 0306 ZKT: 70017001001000
Connector set for motor cable HAN Q8, shielded			
	– HTG: 61 83 401 0131 ZKT: 10032001	6ES7194-1AB01-0XA0 HTG: 61 83 401 0132 ZKT: 10032011	– HTG: 61 83 401 0133 ZKT: 10032021

SINAMICS G120D distributed inverters

0.75 kW to 7.5 kW (1.0 hp to 10 hp)

Supplementary system components

Accessories

Power bus distribution 400 V in IP65 degree of protection

Selection and ordering data

Description	Ordering (see Solution Partner)
Power T clamp connector for 2.5 ... 6 mm² With attached 7-pole connector, socket insert, grommet housing, UL Seals for various cable cross-sections must be ordered separately	Ordered from and supplied by Harting
T clamp connector Completely pre-assembled	Ordered from and supplied by KnorrTec
T distributor box, IDC connection power cable Pre-assembled, UL, uncut power cable, 2.5 ... 6 mm ² , 2 outgoing feeders: Push-in connection: 1.5 ... 6 mm ² Seals for various cable cross-sections must be ordered separately	Ordered from and supplied by Weidmüller
T distributor box Completely pre-assembled	Ordered from and supplied by KnorrTec

Additional information

For further information about the connecting cables and plug-in connectors mentioned above, please refer to Catalog IK PI.



Further selected accessories are available from Siemens Solution Partners. Please go to the "Solution Partner Finder" and select technology "Distributed Field Installation System".
www.siemens.com/automation/partnerfinder

SINAMICS G120D distributed inverters

0.75 kW to 7.5 kW (1.0 hp to 10 hp)

Spare parts Spare Parts Kit

Spare parts Replacement fans

Overview

A Spare Parts Kit can be ordered, comprising small parts such as replacement seals, caps, PROFIBUS address windows and screws.

Selection and ordering data

Description	Order No.
Spare Parts Kit for SINAMICS G120D Comprising replacement seals, caps, PROFIBUS address windows and screws	6SL3500-0SK01-0AA0
Replacement caps for CU240D PN-F PP	
• 24 V push-pull PLUG PRO caps 1 package = 5 units	6ES7194-4JA50-0AA0
• RJ45 PLUG PRO caps 1 package = 5 units	6ES7194-4JD50-0AA0

Overview

The Power Module fans are designed for extra long service life. Replacement fans can be ordered for special applications.

Selection and ordering data

Rated power		SINAMICS G120D Power Module PM250D		Replacement fan (pre-mounted unit with cover, fan and screws)
kW	hp	Type 6SL3525-...	Frame size	Order No.
380 ... 500 V 3 AC				
4.0	5.0	0PE24-0AA1	FSC	6SL3500-0SF01-0AA0
5.5	7.5	0PE25-5AA1		
7.5	10	0PE27-5AA1		

SINAMICS G120D distributed inverters

0.75 kW to 7.5 kW (1.0 hp to 10 hp)

Notes